


# CONICAL CUP

## UM2X

16-48" (406-1219mm)

The basic two cup UMX pigs are generally used for cleaning and scraping of pipelines. This pig is also available in three and four cup configurations. By adding cups to the configuration the UM pig provides a positive seal between dissimilar fluids and is typically used for longer distance operations and for light cleaning of pipelines.

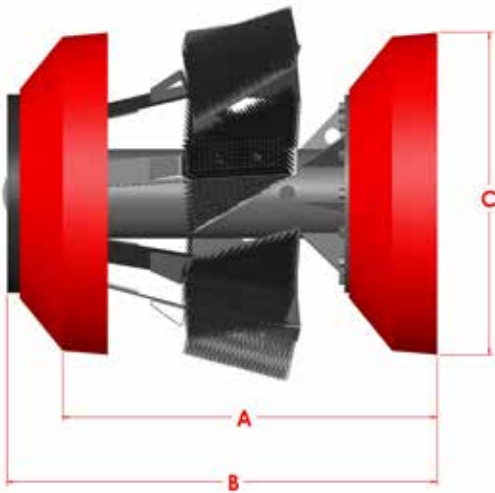

| Size | A      | B      | C      | Weight | Part #   |
|------|--------|--------|--------|--------|----------|
| 16"  | 22.000 | 25.000 | 15.875 | 104    | 60514216 |
| 20"  | 27.250 | 30.875 | 20.000 | 165    | 60514220 |
| 22"  | 29.125 | 31.500 | 22.000 | 212    | 60514222 |
| 24"  | 29.500 | 33.875 | 24.000 | 230    | 60514224 |
| 30"  | 39.750 | 44.875 | 29.875 | 388    | 60514230 |
| 36"  | 45.750 | 52.250 | 36.000 | 551    | 60514236 |
| 42"  | 54.125 | 61.375 | 42.000 | 763    | 60514242 |
| 48"  | 60.375 | 68.625 | 48.000 | 937    | 60514248 |

### Features:

UMX pigs are equipped with Apache Series M cups manufactured from high quality Reliathane. Pipeline pigs mounted with conical cups can traverse pipeline anomalies of up to 20% without damage to inline auxiliary equipment. Standard bumper noses prevent damage to both the pig and in-line auxiliary equipment. All Apache 16"-48" pigs are manufactured with by-pass ports. The ports have threaded plugs that can be removed if by-pass is required.

### Options:

- Gauging plates of aluminum or steel, and either in slotted or standard styles.
- Transmitter cavity for electronic tracking equipment.
- Magnets are available.
- Plow blades.